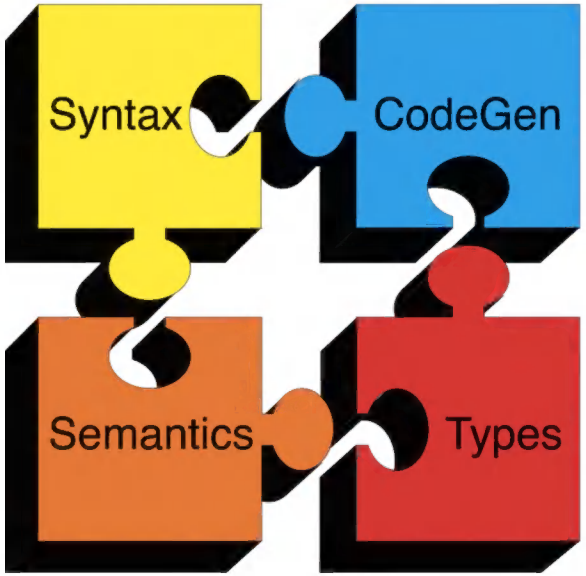

Compilers

Code Generation II

Alex Aiken

A language with integers and integer operations

$$P \rightarrow D; P \mid D$$

$$D \rightarrow \text{def id(ARGS)} = E;$$

$$\text{ARGS} \rightarrow \text{id, ARGS} \mid \text{id}$$

$$E \rightarrow \text{int} \mid \text{id} \mid \text{if } E_1 = E_2 \text{ then } E_3 \text{ else } E_4 \mid E_1 + E_2 \mid E_1 - E_2 \mid \text{id}(E_1,\ldots,E_n)$$

Code Generation II

- Code for function calls and function definitions depends on the layout of the AR

- A very simple AR suffices for this language:
  - The result is always in the accumulator
    - No need to store the result in the AR
  - The activation record holds actual parameters
    - For $f(x_1,\ldots,x_n)$ push $x_n,\ldots,x_1$ on the stack
    - These are the only variables in this language

Code Generation II

- The stack discipline guarantees that on function exit $sp is the same as it was on function entry
  - No need for a control link
- We need the return address
- A pointer to the current activation is useful
  - This pointer lives in register $fp (frame pointer)

Code Generation II

- Summary: For this language, an AR with the caller's frame pointer, the actual parameters, and the return address suffices

- Picture: Consider a call to f(x,y), the AR is:

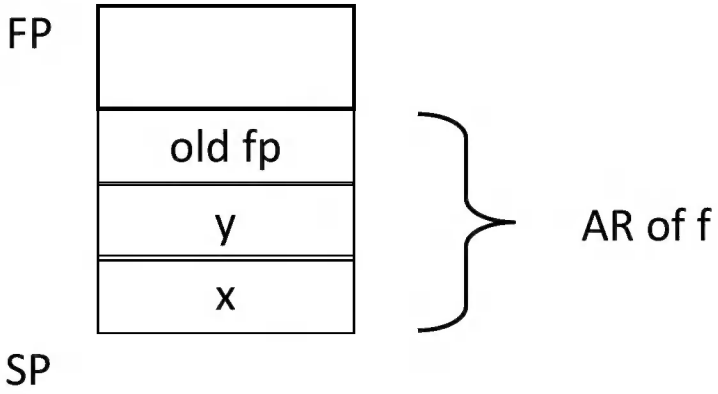

Code Generation II

- The calling sequence is the instructions (of both caller and callee) to set up a function invocation

- New instruction: jal label
  - Jump to label, save address of next instruction in $ra
  - On other architectures the return address is stored on the stack by the “call” instruction

Code Generation II

```
cgen(f(e1,…,en)) =
    sw $fp 0($sp)
    addiu $sp $sp -4
    cgen(en)
    sw $a0 0($sp)
    addiu $sp $sp -4
    …
    cgen(e1)
    sw $a0 0($sp)
    addiu $sp $sp -4
    jal f_entry
```

- The caller saves its value of the frame pointer
- Then it saves the actual parameters in reverse order
- Finally the caller saves the return address in register $ra
- The AR so far is 4*n+4 bytes long

Code Generation II

- New instruction: jr reg
  - Jump to address in register reg

cgen(def f(x_1,…,x_n) = e) =

```
move $fp $sp
sw $ra 0($sp)
addiu $sp $sp -4
cgen(e)
lw $ra 4($sp)
addiu $sp $sp z
lw $fp 0($sp)
jr $ra
```

- Note: The frame pointer points to the top, not bottom of the frame
- The callee pops the return address, the actual arguments and the saved value of the frame pointer
- z = 4*n + 8

Code Generation II

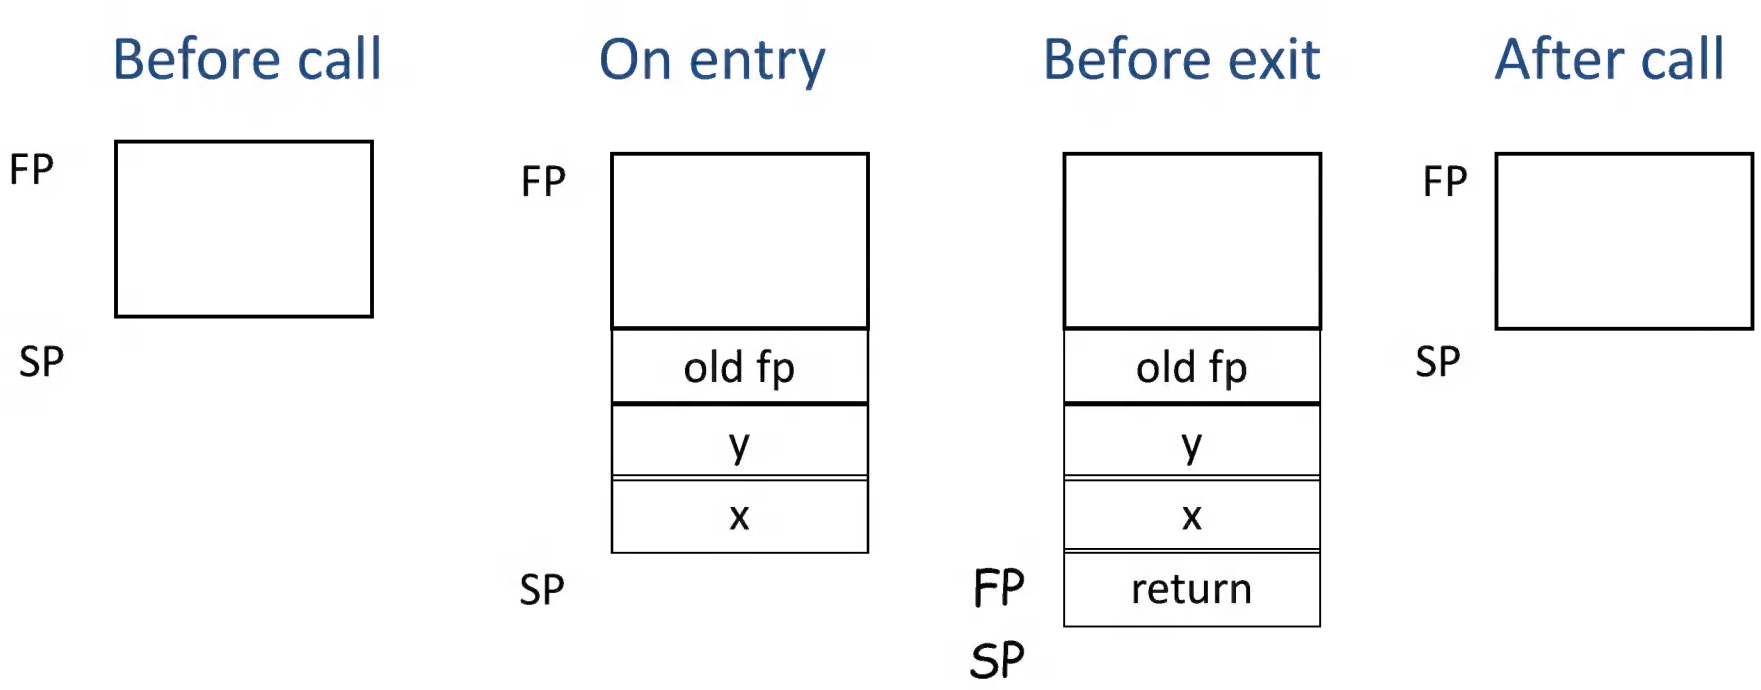

Code Generation II

- Variable references are the last construct

- The “variables” of a function are just its parameters
  - They are all in the AR
  - Pushed by the caller

- Problem: Because the stack grows when intermediate results are saved, the variables are not at a fixed offset from $sp

Code Generation II

- Solution: use a frame pointer
  - Always points to the return address on the stack
  - Since it does not move it can be used to find the variables
- Let x_i be the i^{th} ($i = 1,\ldots,n$) formal parameter of the function for which code is being generated

$$cgen(x_i) = lw\ \$a0\ z(\$fp) \qquad (\ z = 4*i\ )$$

- Example: For a function def f(x,y) = e the activation and frame pointer are set up as follows:

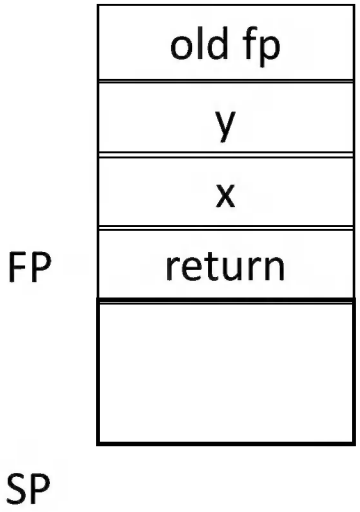

- X is at fp + 4
- Y is at fp + 8

Code Generation II

For the function definitions at right, which of the following appear in the activation record on a call to f()?

- ☐ x
- ☐ t
- ☐ g
- ☐ z

```
def f(x,y,z) =
   if x
   then g(y)
   else g(z)

def g(t) =
   t + 1
```

Code Generation II

- The activation record must be designed together with the code generator
- Code generation can be done by recursive traversal of the AST
- We recommend you use a stack machine for your Cool compiler (it's simple)

Code Generation II

- Production compilers do different things
  - Emphasis is on keeping values in registers
    - Especially the current stack frame
  - Intermediate results are laid out in the AR, not pushed and popped from the stack